


Description

Puran domestic reverse osmosis membranes are produced with grade A sheets. It is used for purifying salty water for drinking. It has stable high salt rejection rate, excellent flow rate and long life. It is the best choice as your family drinking water guard.

Technical Parameters

Model	Salt Rejection Rate (%)	Product Flow Rate gpd (m ³ /d)	Working Pressure (Psi/Mpa)	Feed water TDS (ppm)	Recovery rate (%)
ULP1812-50G	98	50(0.19)	60(0.4)	300	15
ULP1812-75G	98	75(0.28)			
ULP2012-100G	98	100(0.38)			
ULP2012-150G	98	150(0.56)			
ULP2812-200G	98	200(0.76)			
ULP3012-300G	98	300(1.13)			
ULP3013-400G	98	400(1.51)	100(0.6)	300	15
ULP3013-500G	98	500(1.89)			
ULP3013-600G	98	600(2.27)			
ULP3213-800G	98	800(3.02)			
ULP3413-1000G	98	1000(3.78)			

Dimensions

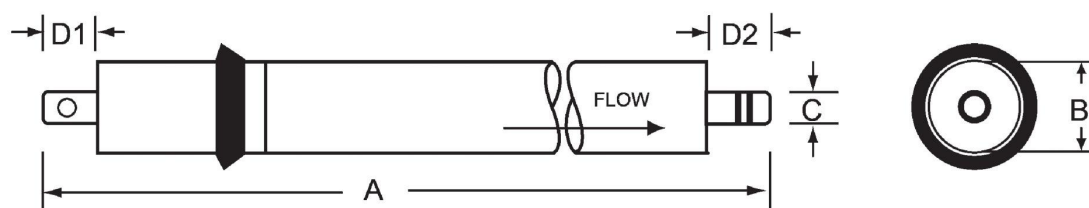

Sizes – inch (mm)

Model	A	B	C	D1	D2
1812	11.74 (298)	1.8 (46)	0.68 (17)	0.84 (21)	0.84 (21)
2012	11.74 (298)	2 (48)	0.68 (17)	0.84 (21)	0.84 (21)
2812	11.74 (298)	2.8 (68)	0.68 (17)	0.84 (21)	0.84 (21)
3012	11.74 (298)	3.0 (73)	0.68 (17)	0.84 (21)	0.84 (21)
3013	13 (333)	3.0 (73)	0.68 (17)	0.6 (15)	0.6 (15)
3213	13(333)	3.2(77.9)	0.68 (17)	0.6 (15)	0.6 (15)
3413	13(333)	3.4(82.7)	0.68 (17)	0.6 (15)	0.6 (15)